

automatic sliding door with aluminum frame for sliding & side fixed panels [MECHANICAL LOCK IN THE BOTTOM PROFILE] *

FRAMED



INAL® automatic sliding door solution with aluminum frame INAL® "SLIM". A durable designed sliding solution, up to 3,00 meters height, which provides safety and stability. Available with lock in the bottom profile for significant safety. Easy installation. Silent and smooth operation.

technical specifications


GLASS TYPE	TEMPERED	LAMINATED	DOUBLE GLAZING
GLASS THICKNESS	8-12 mm	4+4 5+5 6+6	UP TO 18mm TOTAL
MAXIMUM GLASS WEIGHT	100Kg		
MAXIMUM PANEL WIDTH	1,20m		
MAXIMUM OPENING HEIGHT	3,00m		
FINISHING	NATURAL ANODIZED, SATIN ANODIZED, POWDER COATING		

profile




A-1142
HORIZONTAL
PROFILE
INAL® "SLIM"

A/F-1141
VERTICAL
PROFILE
INAL® "SLIM"

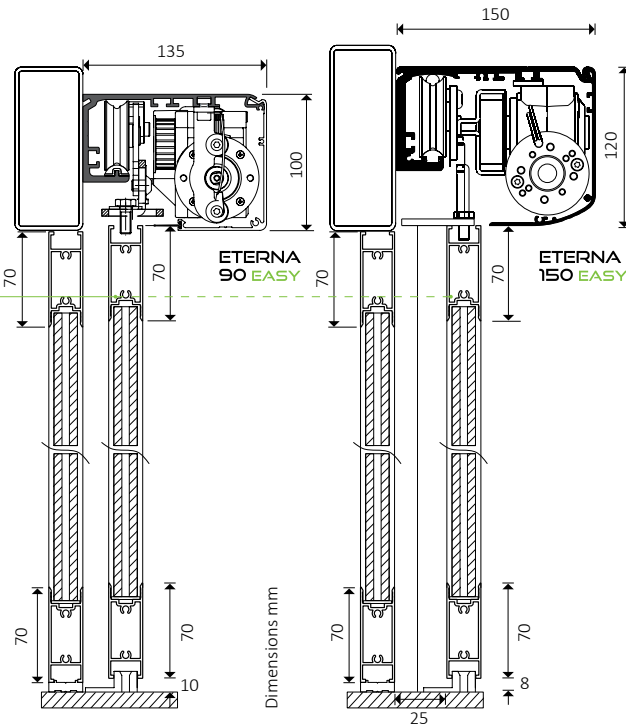


applications

1. SINGLE SLIDING DOOR - ONE FIXED GLASS PANEL



2. DOUBLE SLIDING DOOR - TWO FIXED GLASS PANELS



radar



OA-FLEX T
RADAR

selector



ETERNA-03
DIGITAL SELECTOR

floor guide




1150
FLOOR GUIDE

weatherproofing



A/F-1144
VERTICAL RUBBER

A-1143
PROFILE HANGER



751
ALUMINUM BAR
HOUSING FOR
BRUSH
703
BRUSH L18 & L35
(FOR 751 & 752)

751 +703

locking options



239
MECHANICAL
LOCK FOR
FRAMED DOOR
(DOUBLE LOCKING)



113
LOCK CASING
STAINLESS
STEEL
(DOUBLE LOCKING)



ETERNA-04
ELECTROMAGNETIC
LOCK
WITH MANUAL
RELEASE SYSTEM



ETERNA-25
BUTTON KEY



ETERNA-26
Button Key
Housing

telecommander



291A
BUTTON
(INTERNAL USE)



291C
Button
(Internal Use)



291MH
WIRED INFRARED
TOUCHLESS SWITCH



291MHW1
ONE (1) WIRELESS
INFRARED TOUCHLESS
SWITCH WITH RECEIVER



291MHW2
TWO (2) WIRELESS INFRARED
TOUCHLESS SWITCHES WITH
RECEIVER



EVL-07
RECEIVER
WITH
TELECOMMANDER



EVL-09
TELECOMMANDER