


SWING SOLUTIONS & APPLICATIONS

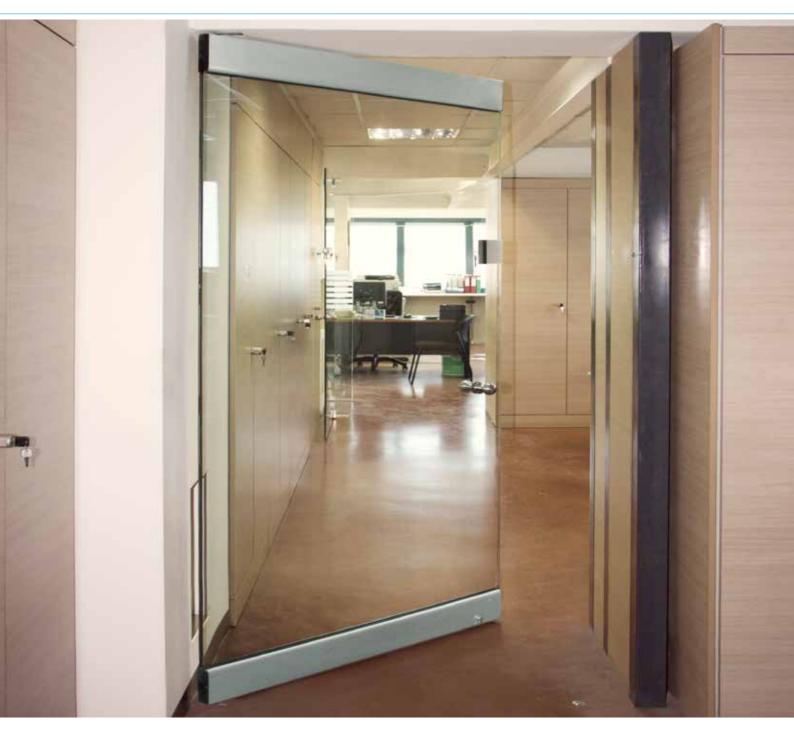

- "CURVED" PROFILE 125mm
- STEREON® PROFILE 100mm

INnovationAL Solutions

"CURVED" PROFILE 125mm

swing door with top and bottom clamp profile


technical specifications

MAXIMUM DOOR DIMENSION	1,20m x 3,20m			
GLASS THICKNESS	10-22mm			
MAXIMUM GLASS WEIGHT	150Kg			
FINISHING				
NATURAL ANODIZED, SATIN ANODIZED				
POWDER COATING				

INAL® glass swing door with top and bottom clamp profile without glass cuttings or drills (patented), with curved design external cover profile 125mm. A durable designed solution, up to 3,2 meters height, which provides extra safety and stability. Variety of glass applications (10mm -22mm), with three different sizes of heavy duty accessories according to the glass thickness. Available with lock mechanism in the bottom clamp for significant safety.

Available in do it yourself (DIY) or made to measure upon request.

system accessories

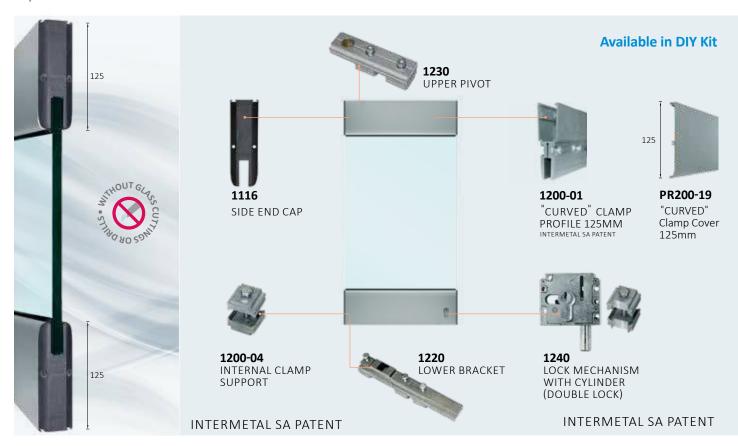

top pivot floor spring lock casing weatherproofing

S.P.				Î
CODE 105	CODE 1229.HD.12	CODE 2020 *	CODE PR200-24	CODE 113
RECTANGULAR TOP PIVOT	HEAVY DUTY RECTANGULAR TOP PIVOT D15MM	FLOOR SPRING SPEEDY M25	FLOOR BUSING STAINLESS STEEL	LOCK CASING STAINLESS STEEL (DOUBLE LOCKING)

* or any floor spring from our range Catalogue "Glass Accesories"

clamp profile sizes

Available in three different sizes according to the glass thickness:

- 1. Glass Thickness 10-12mm
- 2. Glass Thickness 14-15-16mm
- 3. Glass Thickness 20-22mm

Special profiles upon request



side end caps

PLASTIC SIDE END CAP





FOR 10-12mm GLASS FOR 14-16mm GLASS FOR 20-22mm GLASS



top pivots

UPPER PIVOT ALUMINUM



1230.10 FOR 10-12mm GLASS

1230.HD.12 **HEAVY DUTY** FOR 10-12mm GLASS

1230.HD.15 **HEAVY DUTY** FOR 14-16mm GLASS

1230.HD.20 **HEAVY DUTY** FOR 20-22mm GLASS


* With embedded bearing

brackets

LOWER BRACKET STAINLESS STEEL



cross section

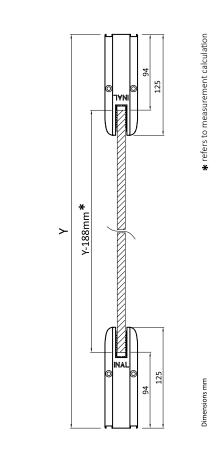

! Apply

THE SAME SYSTEM PARTITIONS IN YOUR **APPLICATIONS**



PROFILE "CURVED" FOR FIXED GLASS

STEREON® PROFILE 100mm

swing door with top and bottom clamp profile

technical specifications


MAXIMUM DOOR DIMENSION	DIMENSION 1,00m x 3,00m	
GLASS THICKNESS	10-22mm	
MAXIMUM GLASS WEIGHT	120Kg	
FINISHING		
NATURAL ANODIZE	D SATIN ANODIZED	

POWDER COATING

INAL® glass swing door with top and bottom STEREON® clamp profile 100 mm without glass cuttings or drills (patented).

A durable designed solution, up to 3 meters height, which provides extra safety and stability. Variety of glass applications (10mm-22mm), with three different sizes of heavy duty accessories according to the glass thickness. Available with lock mechanism in the bottom clamp for significant safety. Available in do it yourself (DIY) or made to measure upon request.

system accessories

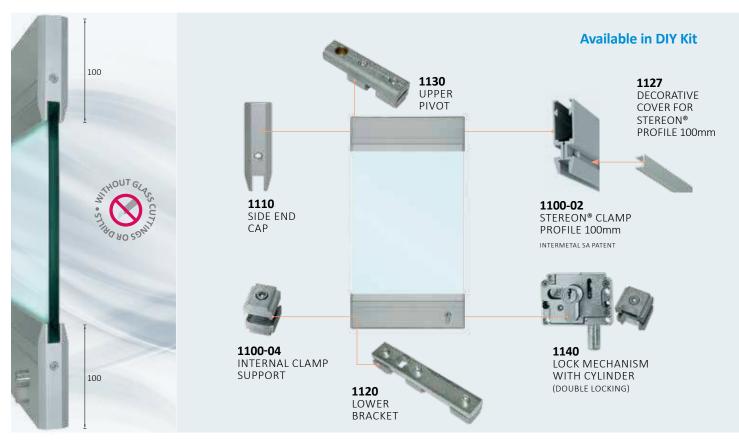

top pivot floor spring lock casing weatherproofing



* or any floor spring from our range Catalogue "Glass Accesories"

INAL

clamp profile sizes

Available in **three different sizes** according to the glass thickness:

- 1. Glass Thickness 10-12mm
- 2. Glass Thickness 14-15-16mm
- 3. Glass Thickness 20-22mm



side end caps

ALUMINUM SIDE END CAP



1110.10 FOR 10-12mm GLASS



1110.15 FOR 14-16mm GLASS



1110.20 FOR 20-22mm GLASS

top pivots

UPPER PIVOT ALUMINUM




* With embedded bearing

brackets

LOWER BRACKET STAINLESS STEEL



cross section

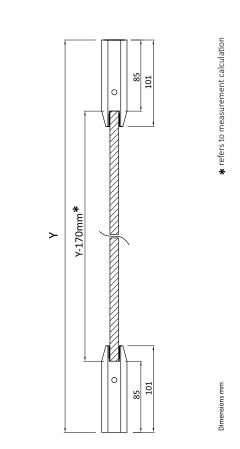

! Apply

STEREON® PROFILE FOR THE FIXED GLASS PARTITIONS OF YOUR APPLICATIONS



PROFILE FOR FIXED GLASS STEREON®

"CURVED" PROFILE 125mm

bottom with mechanical lock & upper hinge




system accessories



STEREON® PROFILE

bottom with mechanical lock & upper hinge

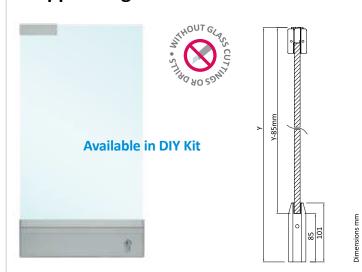

system accessories



top pivot

floor spring

lock casing weatherproofing



* or any floor spring from our range Catalogue "Glass Accesories"



electric locks







DOUBLE ACTION DOOR AL/R

298

ELECTROMAGNETIC LOCK
OPERATES WITH 12V DC





INSTALLATION IN ROOF OR METAL BEAM

accessories for electric locks



296ERECEIVER
WITH REMOTE
CONTROL



1700REMOTE
CONTROL





294E TRANSFORMER 12V DC



TRANSFORMER 12V DC KIT



TRANSFORMER 12V DC KIT WITH RECEIVER & REMOTE CONTROL



291ABUTTON
(INTERNAL USE)



291CBUTTON
(INTERNAL USE)



291MHW1ONE [1] WIRELESS INFRARED TOUCHLESS SWITCH WITH RECEIVER



291MHW2TWO [2] WIRELESS INFRARED
TOUCHLESS SWITCHES WITH RECEIVER



291B BUTTON (INTERNAL USE))



291MHWIRELESS
INFRARED
TOUCHLESS
SWITCH

SWING SOLUTIONS & APPLICATIONS





ALSO DOWNLOAD OUR PRODUCT CATALOGUES





















INnovationAL Solutions



HEADQUARTERS / FACTORY:

6, APOLLONIOU STR., KOROPI 194 00, ATHENS-GREECE, TEL.: +30 210 6620 400, FAX: +30 210 6620 401 intermetal@inal.gr



CERTIFIED

www.inal.gr

III Inal.gr

in company/intermetal-sa